



Voltage Range: 12/24V

Warranty: 5 years

Ingress Protection: IP67

Approval: ECE & EMC ✓

• New design square lamp series

• Tough acrylic lens

• Shock, water & dust proof

• Replacement lamp modules available, see p.020



NEW

STOP / TAIL / INDICATOR

280ARM

Current Draw (13.8V / 28V):

Stop: 0.15A / 0.11A, Tail: 0.02A / 0.03A, Indicator: 0.14A / 0.11A


STOP / TAIL / INDICATOR / REVERSE

280ARWM


Current Draw (13.8V / 28V):

Stop: 0.15A / 0.11A, Tail: 0.02A / 0.03A, Indicator: 0.14A / 0.11A, Reverse: 0.17A / 0.13A

Overall Size: 282 x 95 x 28mm
Cable Length: 1200mm



Overall Size: 282 x 95 x 28mm
Cable Length: 1200mm

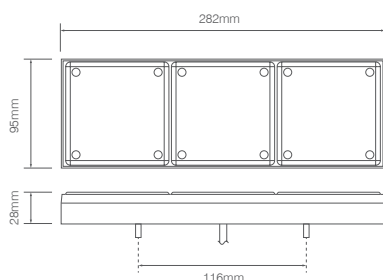

STOP / TAIL / INDICATOR

280ARRM

Current Draw (13.8V / 28V):

Stop: 0.30A / 0.22A, Tail: 0.04A / 0.06A, Indicator: 0.14A / 0.11A