

125 SERIES**TRIPLE COMBINATION REAR LAMPS**

Voltage Range: 12/24V

Warranty: 5 years

Ingress Protection: IP67

Approval: ECE & EMC ✓

- 125mm square lamp modules
- Black or Chrome triple surface mounting bracket
- Tough acrylic lenses
- Shock, water & dust proof

- Replacement lamp modules available; 125AMEB, 125RMEB, 125WMEB, 125FMEB

**STOP / TAIL / INDICATOR****125BARRME** Black

Current Draw (13.8V / 28V):

Stop: 0.42A / 0.26A, Tail: 0.04A / 0.06A,
Indicator: 0.43A / 0.25A

**STOP / TAIL / INDICATOR / FOG****125BFARME** Black

Current Draw (13.8V / 28V):

Stop: 0.42A / 0.26A, Tail: 0.04A / 0.06A,
Indicator: 0.43A / 0.25A, Fog: 0.42A / 0.21A

**STOP / TAIL / INDICATOR / REVERSE****125BRAWME** Black

Current Draw (13.8V / 28V):

Stop: 0.42A / 0.26A, Tail: 0.04A / 0.06A,
Indicator: 0.43A / 0.25A,
Reverse: 0.36A / 0.18A

**STOP / TAIL / INDICATOR****125CARRME** Chrome

Current Draw (13.8V / 28V):

Stop: 0.42A / 0.26A, Tail: 0.04A / 0.06A,
Indicator: 0.43A / 0.25A

**STOP / TAIL / INDICATOR / FOG****125CFARME** Chrome

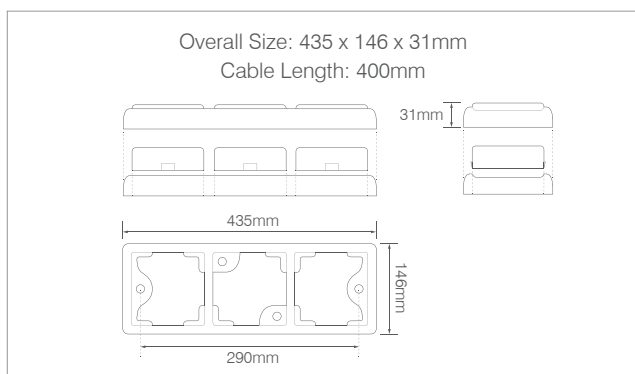
Current Draw (13.8V / 28V):

Stop: 0.42A / 0.26A, Tail: 0.04A / 0.06A,
Indicator: 0.43A / 0.25A, Fog: 0.42A / 0.21A

**STOP / TAIL / INDICATOR / REVERSE****125CRAWME** Chrome

Current Draw (13.8V / 28V):

Stop: 0.42A / 0.26A, Tail: 0.04A / 0.06A,
Indicator: 0.43A / 0.25A,
Reverse: 0.36A / 0.18A

**REPLACEMENT BRACKETS**

125B3B Triple Black Bracket

125B3C Triple Chrome Bracket

